



// DECONTAMINATION ACCESSORIES

APPLICATION FIELDS



Fire department, rescue service and aid organisation



Military



Triage, field hospitals, first aid posts



Industry and commerce




Our range of decontamination accessories includes all the pieces of equipment necessary for a fully operational decontamination system.

- **TAILORED TO YOUR SPECIFIC NEEDS AND TASKS**
- **SUITABLE FOR CONTINUOUS OPERATION**
- **ENSURES THOROUGH CLEANING AND REMOVAL OF CONTAMINANTS**
- **REDUCES THE RISK OF SPREADING CONTAMINANTS FROM ONE AREA TO ANOTHER**

// DECONTAMINATION ACCESSORIES

WATER SUPPLY UNIT

- Reliable delivery of fresh water;
- Steel framework with a horizontally mounted centrifugal pump;
- Stainless steel interior;
- Storz D connectors;
- Inlet filter;
- Check valve;
- Pressure gauge;
- Automatic pressure regulator.



HOTBOX WITH INTEGRATED DOSING FEEDER

- Built-in proportional dosing feeder;
- Works with soaps, lyes, alkaline and acidic media, dosing 1 - 5%;
- Epoxy coated steel frame with covering made of stainless steel;
- 4-wheeled chassis with solid rubber tires;
- Couplings either with 3/4" GEKA or Storz D. Others available on request;
- Lifting eyebolts allow easy transportation.



SUCTION PUMP WITH STAINLESS STEEL BOX

- Electric suction pump for extracting (waste) water;
- Suitable for continuous operation;
- Pumps (fresh or waste) water with a maximum particle size of 4 mm;
- Water level sensor for automatic start and stop;
- Standard coupling: Storz D. Others available on request.




DOSING UNIT

- Non-electrical water driven proportional injection system;
- Injection and/or dosage of detergents or decontamination solutions into the water flow;
- Steel framework;
- Standard Storz-D connector, inlet filter and pressure gauge.




FLEXIBLE TANKS

- Flexible bladder tank;
- Economic, ecological, foldable, reusable, transportable and easy to install;
- Can be used for liquids, or even potable water (with a special fabric);
- Resistance to extreme temperatures (-30 °C to +70 °C);
- Fabric coated PVC from 900 g/m² to 1300 g/m².

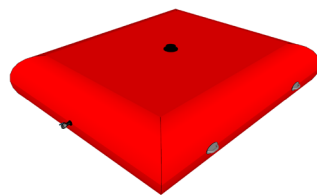

DECONTAMINATION POOLS

- Inflatable frame, made of airtight PVC coated polyester fabric 1100 g/m², light grey;
- Inflation and relief valve;
- Tub, attached by Velcro to frame, PVC-coated polyester fabric 550 g/m² or with anti-slip embossing 850 g/m², grey, other colours upon request.

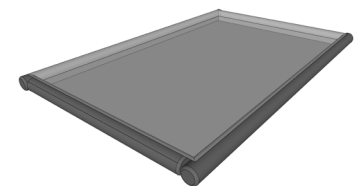

LANCO

LANCO
Dr. Lange GmbH & Co. KG
Sure Wisch 6
30625 Hannover

Telephone: +49 (0)511 367155-0
Fax: +49 (0)511 367155-140
Email: info@lanco-tents.com
Internet: www.lanco-tents.com